

Shininess the Future



上海善宇实业有限公司
Shanghai shininess Industrial Co., Ltd

Tel: +86-21-58545653

Fax: +86-21-58545652

E-mail: info@shininess.com

Website: www.shininess.com

www.shininess-home.com



LED BULBS

G4 / GY6.35 / G8 / G9 / B15 / E12 / E14 / E27 / R7S / MR16 / GU10

Company Profile

Shanghai Shininess Industrial Co., Ltd, established in 2004, specializes in R&D, manufacturing and sales of LED lighting. We have been dedicated to develop more well-designed high quality LED lighting products, and devoted to provide professional services to global customers.

Our main LED lighting products are G4, G8, G9, E12, E14, E27, B15, MR11, MR16 and GU10, which are widely used in indoor lighting, garden lighting and automotive lighting.

Our products have been exported to numerous oversea markets, such as North America, Europe, Asia, etc. and enjoyed a good reputation with the stable high quality and professional services.

The vision of Shininess is to Shininess the Future by offering excellent LED lighting products at affordable prices. We sincerely look forward to cooperating with friends from all over the world and achieve a win-win situation.



Contents

G9 LED Light	01 - 08
G4 LED Light	11 - 15
G8 LED Light	16 - 16
GY6.35 LED Light	17 - 17
B15 LED Light	18 - 18
E12 LED Light	19 - 19
E17 LED Light	20 - 20
E14 LED Light	21 - 22
E27 LED Light	23 - 24
MR11 LED Light	25 - 26
MR16 LED Light	27 - 29
GU10 LED Light	30 - 32
R7S LED Light	33 - 33
PL LED Light	34 - 34



0-100% Dimmable G9 LED Bulb



Model: SNS-G9-2835T-124LED
 Dimension: Ø18.5X75mm
 LED type: 124pcs SMD2835
 Power(±10%): 6.4W
 Lumen(Initial/30mins): 750lm / 700lm
 Beam angle: 360°
 Color: WW, NW, CW
 CRI: Ra>80
 Voltage: 220-240VAC
 Material: Ceramic + PC
 Base: G9
 Remark: 0-100% Dimmable, No Flicker

G9 LED Light Series



Model: SNS-G9-2835T-135LED
 Dimension: Ø18.5X75mm
 LED type: 135pcs SMD2835
 Power(±10%): 6.5W
 Lumen(Initial/30mins): 750lm / 700lm
 Beam angle: 360°
 Color: WW, NW, CW
 CRI: Ra>80
 Voltage: 110-130VAC
 Material: Ceramic + PC
 Base: G9
 Remark: 0-100% Dimmable, No Flicker



Model: SNS-G9-2835T-100LED
 Dimension: Ø18.6X68.3mm
 LED type: 100pcs SMD2835
 Power(±10%): 5.5W
 Lumen(Initial/30mins): 600lm / 550lm
 Beam angle: 360°
 Color: WW, NW, CW
 CRI: Ra>80
 Voltage: 220-240VAC
 Material: Ceramic + PC
 Base: G9
 Remark: 0-100% Dimmable, No Flicker



Model: SNS-G9-2835T-88LED
 Dimension: Ø18X61mm
 LED type: 88pcs SMD2835
 Power(±10%): 4W
 Lumen(Initial/30mins): 460lm / 420lm
 Beam angle: 360°
 Color: WW, NW, CW
 CRI: Ra>80
 Voltage: 110-130VAC / 220-240VAC
 Material: Ceramic + PC
 Base: G9
 Remark: 0-100% Dimmable, No Flicker



Model: SNS-G9-2835T-46LED
 Dimension: Ø18.7X53.8mm
 LED type: 46pcs SMD2835
 Power(±10%): 3.1W
 Lumen(Initial/30mins): 350lm / 300lm
 Beam angle: 360°
 Color: WW, NW, CW
 CRI: Ra>80
 Voltage: 110-130VAC / 220-240VAC
 Material: Ceramic + PC
 Base: G9
 Remark: 0-100% Dimmable, No Flicker



Model: SNS-G9-2835T-34LED
 Dimension: Ø16.5X53.3mm
 LED type: 34pcs SMD2835
 Power(±10%): 3.1W
 Lumen(Initial/30mins): 400lm / 360lm
 Beam angle: 360°
 Color: WW, NW, CW
 CRI: Ra>80
 Voltage: 110-130VAC
 Material: Ceramic + PC
 Base: G9
 Remark: 0-100% Dimmable, No Flicker



Model: SNS-G9-2835T-33LED
 Dimension: Ø18X55mm
 LED type: 33pcs SMD2835
 Power(±10%): 3.5W
 Lumen(Initial/30mins): 410lm / 350lm
 Beam angle: 360°
 Color: WW, NW, CW
 CRI: Ra>80
 Voltage: 220-240VAC
 Material: Ceramic + PC
 Base: G9
 Remark: 0-100% Dimmable, No Flicker

G9 LED Light Series



Model: SNS-G9-2835T-31LED
Dimension: Ø15.5X50mm
LED type: 31pcs SMD2835
Power(±10%): 3W
Lumen(Initial/30mins): 310lm / 280lm
Beam angle: 360°
Color: WW, NW, CW
CRI: Ra>80
Voltage: 220-240VAC
Material: Ceramic + PC
Base: G9
Remark: 0-100% Dimmable, No Flicker



Model: SNS-G9-2835T-32LED
Dimension: Ø17X49mm
LED type: 32pcs SMD2835
Power(±10%): 3W
Lumen(Initial/30mins): 330lm / 300lm
Beam angle: 360°
Color: WW, NW, CW
CRI: Ra>80
Voltage: 110-130VAC / 220-240VAC
Material: Ceramic + PC
Base: G9
Remark: 0-100% Dimmable, No Flicker



Model: SNS-G9-2835D-32LED
Dimension: Ø17X49mm
LED type: 32pcs SMD2835
Power(±10%): 3W
Lumen(Initial/30mins): 330lm / 300lm
Beam angle: 360°
Color: WW, NW, CW
CRI: Ra>80
Voltage: 220-240VAC
Material: Ceramic + PC
Base: G9
Remark: 3-Step Dimmable, No Flicker



Model: SNS-G9-1313T-3W
Dimension: Ø24.5X42mm
LED type: 1pc COB1313
Power(±10%): 3W
Lumen(Initial/30mins): 300lm / 270lm
Beam angle: 38°
Color: WW, NW, CW
CRI: Ra>80
Voltage: 220-240VAC
Material: Ceramic + PC
Base: G9
Remark: 0-100% Dimmable, No Flicker



Model: SNS-G9-1313D-3W
Dimension: Ø24.5X42mm
LED type: 1pc COB1313
Power(±10%): 3W
Lumen(Initial/30mins): 300lm / 270lm
Beam angle: 38°
Color: WW, NW, CW
CRI: Ra>80
Voltage: 220-240VAC
Material: Ceramic + PC
Base: G9
Remark: 3-Step Dimmable, No Flicker



Model: SNS-G9-1313-3W
Dimension: Ø24.5X42mm
LED type: 1pc COB1313
Power(±10%): 3W
Lumen(Initial/30mins): 310lm / 280lm
Beam angle: 38°
Color: WW, NW, CW
CRI: Ra>80
Voltage: 220-240VAC
Material: Ceramic + PC
Base: G9
Remark: Non-dimmable, No Flicker



Model: SNS-G9-2835-124LED
Dimension: Ø18.5X75mm
LED type: 124pcs SMD2835
Power(±10%): 7W
Lumen(Initial/30mins): 1150lm / 1000lm
Beam angle: 360°
Color: WW, NW, CW
CRI: Ra>80
Voltage: 100-265VAC
Material: Ceramic + PC
Base: G9
Remark: Non-dimmable, No Flicker





Model: SNS-G9-2835-100LED
Dimension: Ø18.6X68.3mm
LED type: 100pcs SMD2835
Power(±10%): 5.5W
Lumen(Initial/30mins): 830lm / 740lm
Beam angle: 360°
Color: WW, NW, CW
CRI: Ra>80
Voltage: 100-265VAC
Material: Ceramic + PC
Base: G9
Remark: Non-dimmable, No Flicker



Model: SNS-G9-5730-75LED
Dimension: Ø18.6X68.5mm
LED type: 75pcs SMD5730
Power(±10%): 5.6W
Lumen(Initial/30mins): 900lm / 800lm
Beam angle: 360°
Color: WW, NW, CW
CRI: Ra>80
Voltage: 100-265VAC
Material: Ceramic + PC
Base: G9
Remark: Non-dimmable, No Flicker



Model: SNS-G9-2835-88LED
Dimension: Ø18X61mm
LED type: 88pcs SMD2835
Power(±10%): 4.8W
Lumen(Initial/30mins): 630lm / 570lm
Beam angle: 360°
Color: WW, NW, CW
CRI: Ra>80
Voltage: 110-130VAC / 220-240VAC
Material: Ceramic + PC
Base: G9
Remark: Non-dimmable, No Flicker



Model: SNS-G9-4014-54LED
Dimension: Ø16.5X54mm
LED type: 54pcs SMD4014
Power(±10%): 3W
Lumen(Initial/30mins): 430lm / 360lm
Beam angle: 360°
Color: WW, NW, CW
CRI: Ra>80
Voltage: 100-265VAC
Material: Ceramic + PC
Base: G9
Remark: Non-dimmable, No Flicker



Model: SNS-G9-2835-51LED
Dimension: Ø16X50mm
LED type: 51pcs SMD2835
Power(±10%): 3W
Lumen(Initial/30mins): 480lm / 420lm
Beam angle: 360°
Color: WW, NW, CW
CRI: Ra>80
Voltage: 110-130VAC / 220-240VAC
Material: Ceramic + PC
Base: G9
Remark: Non-dimmable, No Flicker



Model: SNS-G9-2835-34LED
Dimension: Ø15.5X51mm
LED type: 34pcs SMD2835
Power(±10%): 3W
Lumen(Initial/30mins): 410lm / 370lm
Beam angle: 360°
Color: WW, NW, CW
CRI: Ra>90
Voltage: 220-240VAC
Material: Ceramic + PC
Base: G9
Remark: Non-dimmable, No Flicker



Model: SNS-G9-2835-64LED
Dimension: Ø19X55mm
LED type: 64pcs SMD2835
Power(±10%): 4.5W
Lumen(Initial/30mins): 530lm / 480lm
Beam angle: 360°
Color: WW, NW, CW
CRI: Ra>80
Voltage: 220-240VAC
Material: Ceramic + PC
Base: G9
Remark: Non-dimmable, No Flicker



Model: SNS-G9-2835-54LED
Dimension: Ø16.5X54mm
LED type: 54pcs SMD2835
Power(±10%): 3W
Lumen(Initial/30mins): 450lm / 400lm
Beam angle: 360°
Color: WW, NW, CW
CRI: Ra>80
Voltage: 100-265VAC
Material: Ceramic + PC
Base: G9
Remark: Non-dimmable, No Flicker



Model: SNS-G9-2835B-54LED
Dimension: Ø15.5X50mm
LED type: 54pcs SMD2835
Power(±10%): 2.7W
Lumen(Initial/30mins): 380lm / 340lm
Beam angle: 360°
Color: WW, NW, CW
CRI: Ra>80
Voltage: 85-265VAC
Material: Ceramic + PC
Base: G9
Remark: Non-dimmable, No Flicker



Model: SNS-G9-2835-32LED
Dimension: Ø17X49mm
LED type: 32pcs SMD2835
Power(±10%): 3.3W
Lumen(Initial/30mins): 380lm / 350lm
Beam angle: 360°
Color: WW, NW, CW
CRI: Ra>80
Voltage: 110-130VAC / 220-240VAC
Material: Ceramic + PC
Base: G9
Remark: Non-dimmable, No Flicker



Model: SNS-G9-2835B-32LED
Dimension: Ø15.5X50mm
LED type: 32pcs SMD2835
Power(±10%): 3W
Lumen(Initial/30mins): 360lm / 330lm
Beam angle: 360°
Color: WW, NW, CW
CRI: Ra>80
Voltage: 110-130VAC / 220-240VAC
Material: Ceramic + PC
Base: G9
Remark: Non-dimmable, No Flicker



Model: SNS-G9-2508-2.5W
Dimension: Ø8.5X56mm
LED type: 1pc COB2508
Power(±10%): 2.5W
Lumen(Initial/30mins): 240lm / 210lm
Beam angle: 360°
Color: WW, NW, CW
CRI: Ra>80
Voltage: 220-240VAC
Material: Silicone Glue
Base: G9
Remark: Non-dimmable, No Flicker



Model: SNS-G9-2835A-16LED
Dimension: Ø14X46mm
LED type: 16pcs SMD2835
Power(±10%): 1.4W
Lumen(Initial/30mins): 180lm / 150lm
Beam angle: 360°
Color: WW, NW, CW
CRI: Ra>80
Voltage: 220-240VAC
Material: PC
Base: G9
Remark: Non-dimmable, No Flicker



Model: SNS-G9-2835B-16LED
Dimension: Ø16.5X48.5mm
LED type: 16pcs SMD2835
Power(±10%): 1.5W
Lumen(Initial/30mins): 160lm / 140lm
Beam angle: 360°
Color: WW, NW, CW
CRI: Ra>80
Voltage: 220-240VAC
Material: PC
Base: G9
Remark: Non-dimmable, No Flicker



Model: SNS-G9-2835C-16LED
Dimension: Ø15X42.5mm
LED type: 16pcs SMD2835
Power(±10%): 2.1W
Lumen(Initial/30mins): 270lm / 240lm
Beam angle: 360°
Color: WW, NW, CW
CRI: Ra>80
Voltage: 110-130VAC / 220-240VAC
Material: Ceramic + PC
Base: G9
Remark: Non-dimmable, No Flicker



Model: SNS-G9-4LED-2WL
Dimension: Ø14.5X57mm
LED type: 4pcs Filament LED
Power(±10%): 1.8W
Lumen(Initial/30mins): 180lm / 160lm
Beam angle: 360°
Color: WW, NW, CW
CRI: Ra>80
Voltage: 110-130V / 220-240VAC
Material: PC
Base: G9
Remark: Non-dimmable, No Flicker



Model: SNS-G9-4LED-2W
Dimension: Ø16X46.5mm
LED type: 4pcs Filament LED
Power(±10%): 1.8W
Lumen(Initial/30mins): 180lm / 160lm
Beam angle: 360°
Color: WW, NW, CW
CRI: Ra>80
Voltage: 220-240VAC
Material: Ceramic + PC
Base: G9
Remark: 0-100% Dimmable, No Flicker



Model: SNS-G9-4LED-3W
Dimension: Ø16X61mm
LED type: 4pcs Filament LED
Power(±10%): 2.7W
Lumen(Initial/30mins): 270lm / 250lm
Beam angle: 360°
Color: WW, NW, CW
CRI: Ra>80
Voltage: 220-240VAC
Material: Ceramic + PC
Base: G9
Remark: 0-100% Dimmable, No Flicker

Smart LED Light
Comfortable & Eye-protecting





Dimmable



No Flicker



3-Color Adjustable

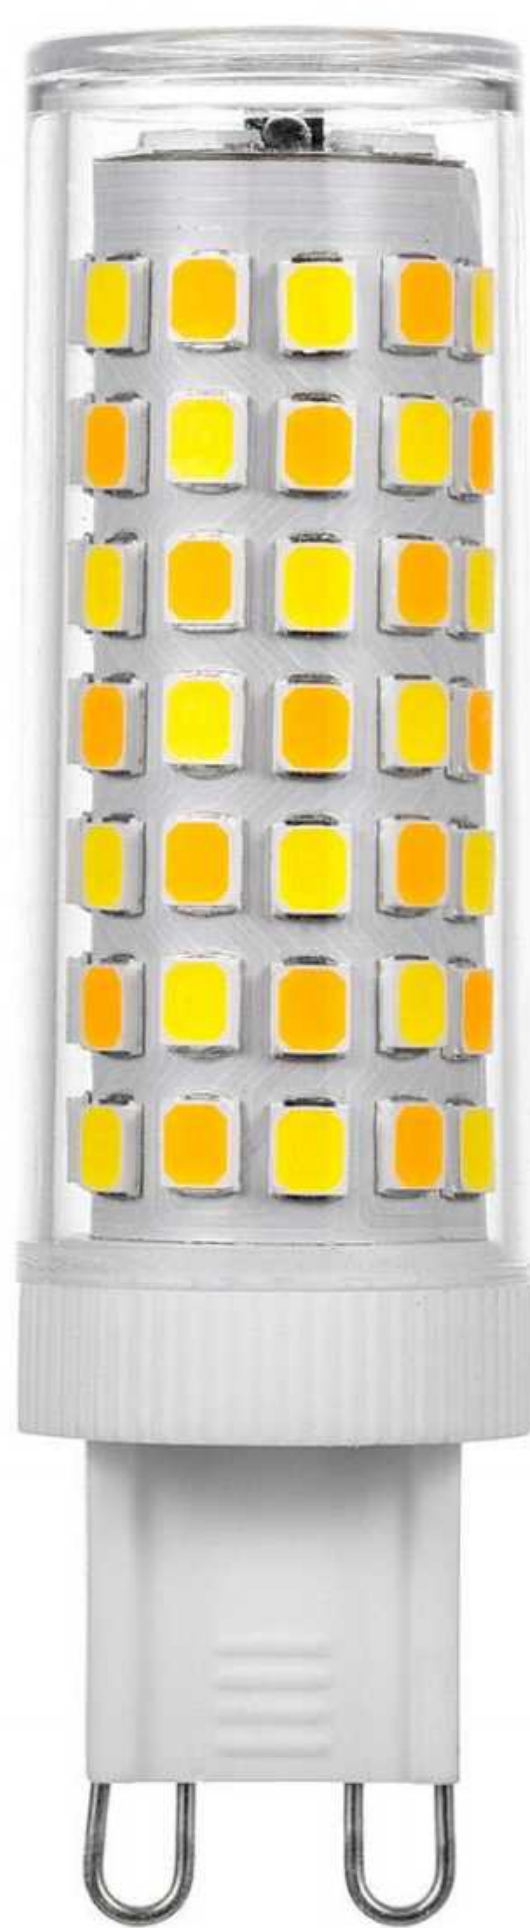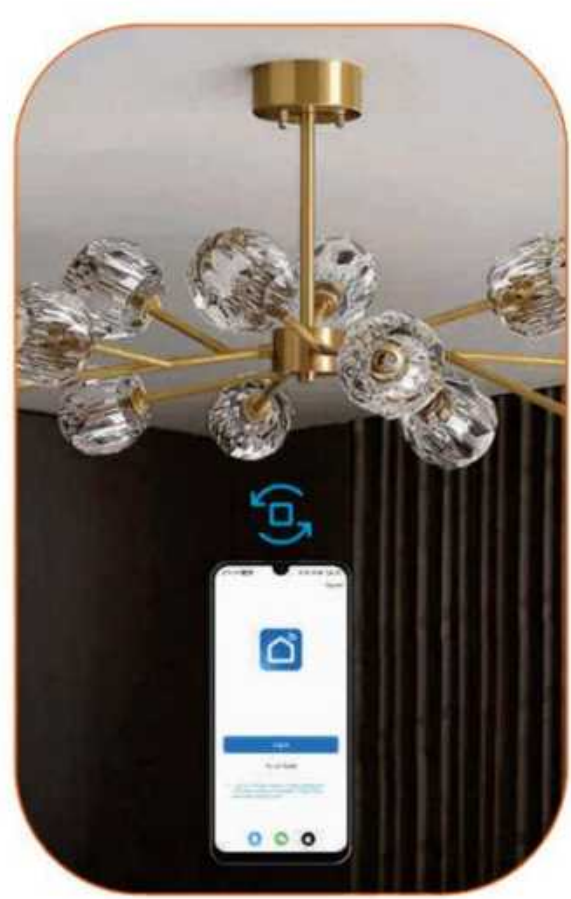

Model: SNS-G9-2835S-88LED
Dimension: Ø18.6X68.3mm
LED type: 88pcs SMD2835
Power(±10%): 4.2W
Lumen(Initial/30mins): 450lm / 350lm
Beam angle: 360°
Color temperature: 2700K-3000K-4000K-6000K
CRI: Ra>80
Voltage: 220-240VAC
Material: Ceramic + PC
Base: G9
Remark: Bluetooth app, Dimmable, 3-Color smart, No Flicker



Model: SNS-G9-2835S-64LED
Dimension: Ø18X64.5mm
LED type: 64pcs SMD2835
Power(±10%): 3.5W
Lumen(Initial/30mins): 400lm / 350lm
Beam angle: 360°
Color temperature: 2700K-3000K-4000K-6000K
CRI: Ra>80
Voltage: 220-240VAC
Material: Ceramic + PC
Base: G9
Remark: Bluetooth app, Dimmable, 3-Color smart, No Flicker



Model: SNS-G4-4014D-45LED
Dimension: Ø13.5X41mm
LED type: 45pcs SMD4014
Power(±10%): 2.1W
Lumen(Initial/30mins): 280lm / 240lm
Beam angle: 360°
Color: WW, NW, CW
CRI: Ra>80
Voltage: 12-24VAC/DC
Material: Ceramic + PC
Base: G4
Remark: Dimmable



Model: SNS-G4-0705D-1WA
Dimension: Ø10X30mm
LED type: 1pc COB0705
Power(±10%): 1.1W
Lumen(Initial/30mins): 100lm / 85lm
Beam angle: 360°
Color: WW, NW, CW
CRI: Ra>80
Voltage: 12-24VAC/DC
Material: Silicone Glue
Base: G4
Remark: Dimmable



Model: SNS-G4-2835D-10LED
Dimension: Ø10X37.5mm
LED type: 10pcs SMD2835
Power(±10%): 2W
Lumen(Initial/30mins): 220lm / 200lm
Beam angle: 360°
Color: WW, NW, CW
CRI: Ra>80
Voltage: 12-24VAC/DC
Material: Silicone Glue
Base: G4
Remark: Dimmable




Model: SNS-G4-0705W-1W
Dimension: Ø11X34mm
LED type: 1pc COB0705
Power(±10%): 1.1W
Lumen(Initial/30mins): 110lm / 100lm
Beam angle: 360°
Color: WW, NW, CW
CRI: Ra>80
Voltage: 12VAC/DC
Material: Silicone Glue
Base: G4
Remark: Non-dimmable, No Flicker



Model: SNS-G4-1505W-1.5W
Dimension: Ø10.5X41.5mm
LED type: 1pc COB1505
Power(±10%): 1.5W
Lumen(Initial/30mins): 190lm / 150lm
Beam angle: 360°
Color: WW, NW, CW
CRI: Ra>80
Voltage: 12VAC/DC
Material: Silicone Glue
Base: G4
Remark: Non-dimmable, No Flicker



Model: SNS-G4-1508W-2W
Dimension: Ø13X37.5mm
LED type: 1pc COB1508
Power(±10%): 2W
Lumen(Initial/30mins): 290lm / 240lm
Beam angle: 360°
Color: WW, NW, CW
CRI: Ra>80
Voltage: 12VAC/DC
Material: Silicone Glue
Base: G4
Remark: Non-dimmable, No Flicker

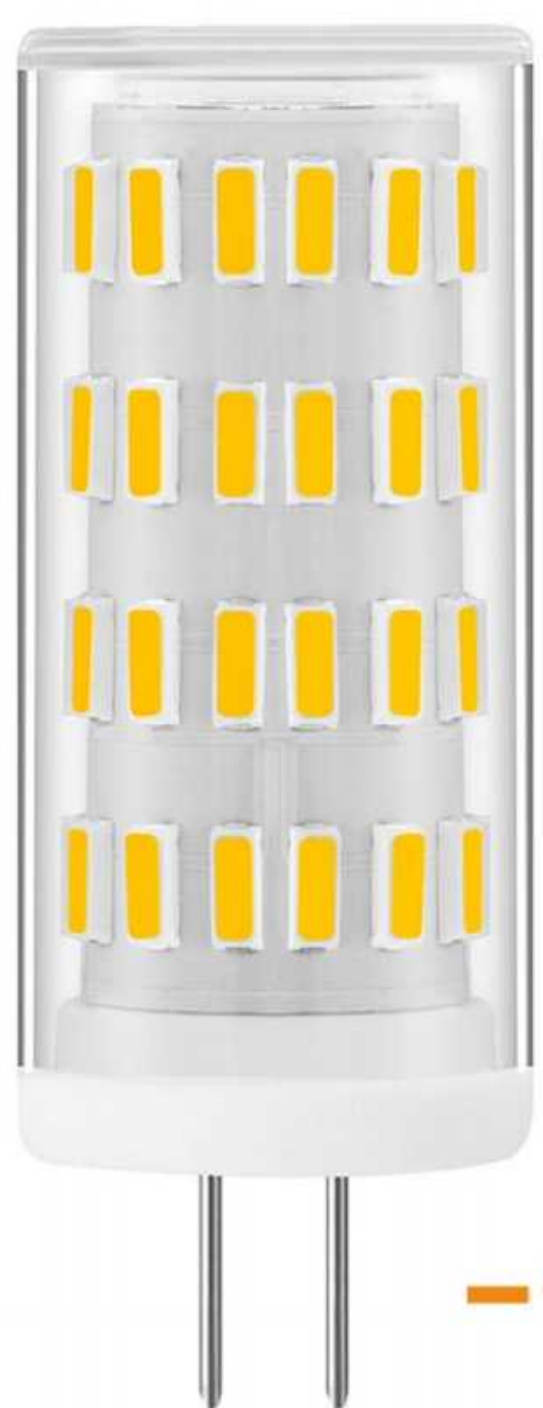

Model: SNS-G4-4014D-63LED
Dimension: Ø16.5X44mm
LED type: 63pcs SMD4014
Power(±10%): 3.1W
Lumen(Initial/30mins): 400lm / 330lm
Beam angle: 360°
Color: WW, NW, CW
CRI: Ra>80
Voltage: 12-24VAC/DC
Material: Ceramic + PC
Base: G4
Remark: Dimmable



Model: SNS-G4-1505D-1.5WA
Dimension: Ø10X37mm
LED type: 1pc COB1505
Power(±10%): 1.6W
Lumen(Initial/30mins): 180lm / 160lm
Beam angle: 360°
Color: WW, NW, CW
CRI: Ra>80
Voltage: 12-24VAC/DC
Material: Silicone Glue
Base: G4
Remark: Dimmable



Model: SNS-G4-2835D-20LED
Dimension: Ø13X37mm
LED type: 20pcs SMD2835
Power(±10%): 2.4W
Lumen(Initial/30mins): 330lm / 290lm
Beam angle: 360°
Color: WW, NW, CW
CRI: Ra>80
Voltage: 12-24VAC/DC
Material: Silicone Glue
Base: G4
Remark: Dimmable



Model: SNS-G4-3014W-24LED
Dimension: Ø10X36mm
LED type: 24pcs SMD3014
Power(±10%): 1.1W
Lumen(Initial/30mins): 100lm / 80lm
Beam angle: 360°
Color: WW, NW, CW
CRI: Ra>80
Voltage: 12VAC/DC
Material: Silicone Glue
Base: G4
Remark: Non-dimmable, No Flicker




Model: SNS-G4-3014W-48LED
Dimension: Ø13X37.2mm
LED type: 48pcs SMD3014
Power(±10%): 1.9W
Lumen(Initial/30mins): 210lm / 190lm
Beam angle: 360°
Color: WW, NW, CW
CRI: Ra>80
Voltage: 12VAC/DC
Material: Silicone Glue
Base: G4
Remark: Non-dimmable, No Flicker



Model: SNS-G4-2835W-8LED
Dimension: Ø11X38mm
LED type: 8pcs SMD2835
Power(±10%): 1.5W
Lumen(Initial/30mins): 160lm / 130lm
Beam angle: 360°
Color: WW, NW, CW
CRI: Ra>80
Voltage: 12VAC/DC
Material: Silicone Glue
Base: G4
Remark: Non-dimmable, No Flicker



Model: SNS-G4-2835W-10LED
Dimension: Ø10X37mm
LED type: 10pcs SMD2835
Power(±10%): 1.3W
Lumen(Initial/30mins): 160lm / 140lm
Beam angle: 360°
Color: WW, NW, CW
CRI: Ra>80
Voltage: 12VAC/DC
Material: Ceramic + PC
Base: G4
Remark: Non-dimmable, No Flicker

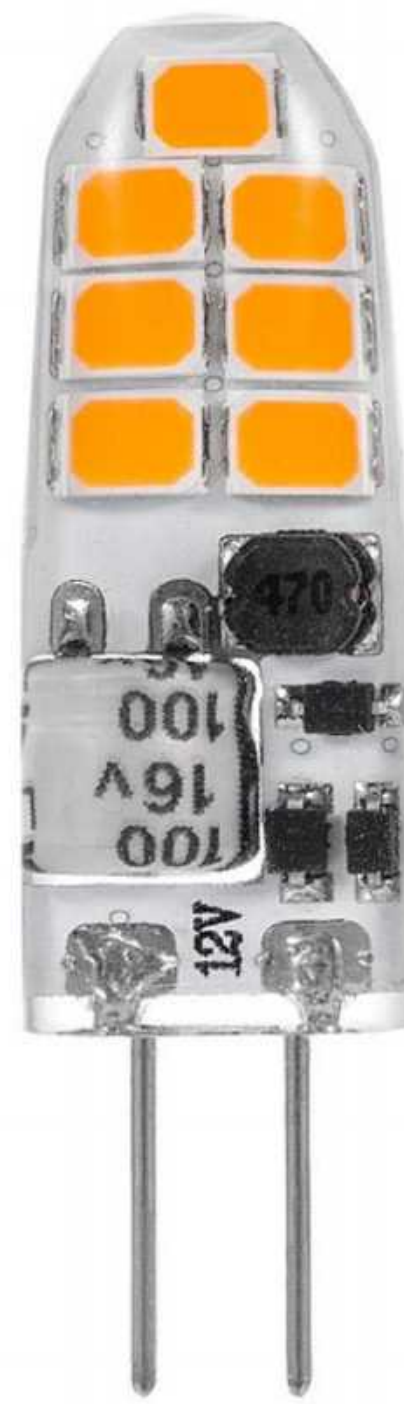

Model: SNS-G4-2835W-14LED
Dimension: Ø10X30mm
LED type: 14pcs SMD2835
Power(±10%): 1.2W
Lumen(Initial/30mins): 160lm / 140lm
Beam angle: 360°
Color: WW, NW, CW
CRI: Ra>80
Voltage: 12VAC/DC
Material: Silicone Glue
Base: G4
Remark: Non-dimmable, No Flicker



Model: SNS-G4-2835B-14LED
Dimension: Ø10.5X37mm
LED type: 14pcs SMD2835
Power(±10%): 1.3W
Lumen(Initial/30mins): 200lm / 180lm
Beam angle: 360°
Color: WW, NW, CW
CRI: Ra>80
Voltage: 12VAC/DC
Material: Ceramic + PC
Base: G4
Remark: Non-dimmable, No Flicker



Model: SNS-G4-2835W-12LED
Dimension: Ø12X38.5mm
LED type: 12pc SMD2835
Power(±10%): 1.1W
Lumen(Initial/30mins): 130lm / 120lm
Beam angle: 360°
Color: WW, NW, CW
CRI: Ra>80
Voltage: 12VAC/DC
Material: PC
Base: G4
Remark: Non-dimmable, No Flicker



Model: SNS-G4-2835B-16LED
Dimension: Ø10X35mm
LED type: 16pc SMD2835
Power(±10%): 1.3W
Lumen(Initial/30mins): 190lm / 160lm
Beam angle: 360°
Color: WW, NW, CW
CRI: Ra>80
Voltage: 12VAC/DC
Material: PC
Base: G4
Remark: Non-dimmable, No Flicker



Model: SNS-G4-2835C-16LED
Dimension: Ø13X39mm
LED type: 16pc SMD2835
Power(±10%): 1.4W
Lumen(Initial/30mins): 190lm / 160lm
Beam angle: 360°
Color: WW, NW, CW
CRI: Ra>80
Voltage: 12VAC/DC
Material: PC
Base: G4
Remark: Non-dimmable, No Flicker



Model: SNS-G4-2835W-16LED
Dimension: Ø13X37mm
LED type: 16pcs SMD2835
Power(±10%): 1.8W
Lumen(Initial/30mins): 240lm / 190lm
Beam angle: 360°
Color: WW, NW, CW
CRI: Ra>80
Voltage: 12-24VAC/DC
Material: Silicone Glue
Base: G4
Remark: Non-dimmable, No Flicker




Model: SNS-G4-2835W-20LED
Dimension: Ø13X37mm
LED type: 20pcs SMD2835
Power(±10%): 2.1W
Lumen(Initial/30mins): 250lm / 230lm
Beam angle: 360°
Color: WW, NW, CW
CRI: Ra>80
Voltage: 12VAC/DC
Material: Silicone Glue
Base: G4
Remark: Non-dimmable, No Flicker



Model: SNS-G4-4014W-63LED
Dimension: Ø16.5X44mm
LED type: 63pcs SMD4014
Power(±10%): 3.1W
Lumen(Initial/30mins): 400lm / 330lm
Beam angle: 360°
Color: WW, NW, CW
CRI: Ra>80
Voltage: 12VAC/DC
Material: Ceramic + PC
Base: G4
Remark: Non-dimmable, No Flicker



Model: SNS-G4-0705-1WA
Dimension: Ø9.6X30mm
LED type: 1pc COB0705
Power(±10%): 1.1W
Lumen(Initial/30mins): 110lm / 95lm
Beam angle: 360°
Color: WW, NW, CW
CRI: Ra>80
Voltage: 12VAC/DC
Material: Silicone Glue
Base: G4
Remark: Non-dimmable

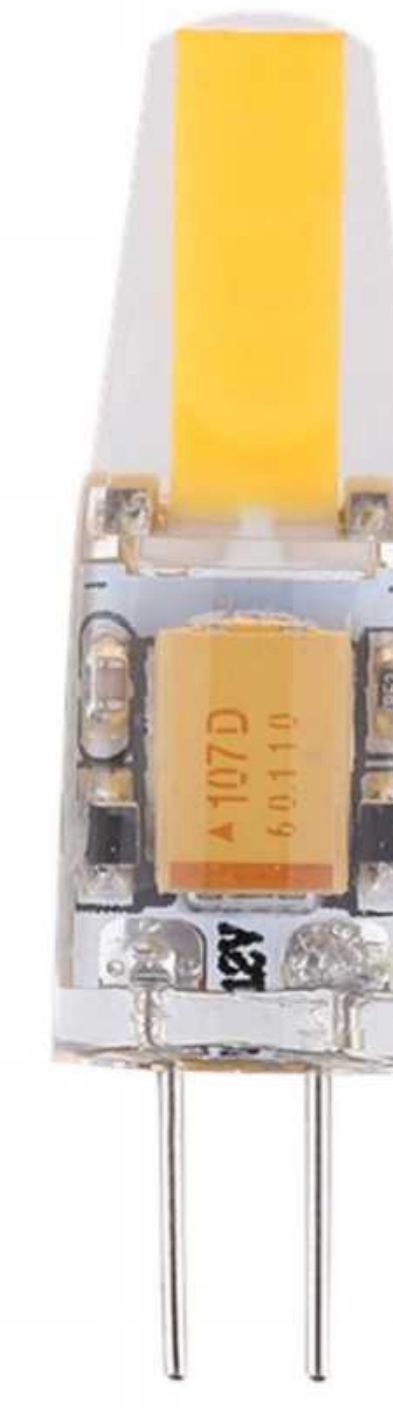

Model: SNS-G4-1505-1.5WA
Dimension: Ø10X37.5mm
LED type: 1pc COB1505
Power(±10%): 1.5W
Lumen(Initial/30mins): 190lm / 160lm
Beam angle: 360°
Color: WW, NW, CW
CRI: Ra>80
Voltage: 12VAC/DC
Material: Silicone Glue
Base: G4
Remark: Non-dimmable



Model: SNS-G4-1508-2.5WA
Dimension: Ø12.5X37mm
LED type: 1pc COB1508
Power(±10%): 2.3W
Lumen(Initial/30mins): 290lm / 250lm
Beam angle: 360°
Color: WW, NW, CW
CRI: Ra>80
Voltage: 12VAC/DC
Material: Silicone Glue
Base: G4
Remark: Non-dimmable

G4 LED Light Series



Model: SNS-G4-4014C-60LED

Dimension: Ø16.5X44.3mm
LED type: 60pcs SMD4014
Power(±10%): 3W
Lumen(Initial/30mins): 360lm / 320lm
Beam angle: 360°
Color: 3000K-4000K-6000K
CRI: Ra>80
Voltage: 220-240VAC
Material: Ceramic + PC
Base: G4
Remark: 3-Color Adjustable, No Flicker



Model: Model: SNS-G4-2508C-2.5W

Dimension: Ø13X48mm
LED type: 1pc COB2508
Power(±10%): 2.5W
Lumen(Initial/30mins): 240lm / 210lm
Beam angle: 360°
Color: WW, NW, CW
CRI: Ra>80
Voltage: 220-240VAC
Material: Silicone Glue
Base: G4
Remark: Non-dimmable, No Flicker



Model: SNS-G4-2835-31LED

Dimension: Ø15.5X41mm
LED type: 31pcs SMD2835
Power(±10%): 2.5W
Lumen(Initial/30mins): 270lm / 240lm
Beam angle: 360°
Color: WW, NW, CW
CRI: Ra>80
Voltage: 220-240VAC
Material: Ceramic + PC
Base: G4
Remark: Non-dimmable, No Flicker



Model: SNS-G4-4014C-31LED

Dimension: Ø13.5X41mm
LED type: 31pcs SMD4014
Power(±10%): 2W
Lumen(Initial/30mins): 240lm / 220lm
Beam angle: 360°
Color: WW, NW, CW
CRI: Ra>80
Voltage: 220-240VAC
Material: Ceramic + PC
Base: G4
Remark: Non-dimmable, No Flicker



Model: Model: SNS-G4-1505C-1.5W

Dimension: Ø11X41mm
LED type: 1pc COB1505
Power(±10%): 1.4W
Lumen(Initial/30mins): 160lm / 140lm
Beam angle: 360°
Color: WW, NW, CW
CRI: Ra>80
Voltage: 220-240VAC
Material: Silicone Glue
Base: G4
Remark: Non-dimmable, No Flicker



Model: SNS-G4-2835-54LED

Dimension: Ø15.5X40mm
LED type: 54pcs SMD2835
Power(±10%): 2.7W
Lumen(Initial/30mins): 380lm / 340lm
Beam angle: 360°
Color: WW, NW, CW
CRI: Ra>80
Voltage: 85-265VAC
Material: Ceramic + PC
Base: G4
Remark: Non-dimmable, No Flicker

G4 LED Light Series



Model: SNS-G4-2835T-31LED

Dimension: Ø15.5X41mm
LED type: 31pcs SMD2835
Power(±10%): 2.5W
Lumen(Initial/30mins): 250lm / 220lm
Beam angle: 360°
Color: WW, NW, CW
CRI: Ra>80
Voltage: 220-240VAC
Material: Ceramic + PC
Base: G4
Remark: 0-100% Dimmable, No Flicker



Model: SNS-G4-2835T-34LED

Dimension: Ø15.5X41mm
LED type: 34pcs SMD2835
Power(±10%): 2.7W
Lumen(Initial/30mins): 280lm / 250lm
Beam angle: 360°
Color: WW, NW, CW
CRI: Ra>80
Voltage: 220-240VAC
Material: Ceramic + PC
Base: G4
Remark: 0-100% Dimmable, No Flicker



G4 LED Light Series



Model: SNS-G4-2835-9LED
Dimension: Ø24X38mm
LED type: 8pcs SMD2835
Power(±10%): 1.2W
Lumen(Initial/30mins): 110lm / 100lm
Beam angle: 120°
Color: WW, NW, CW
CRI: Ra>80
Voltage: 12VAC/DC
Material: PCB
Base: G4
Remark: Non-dimmable



Model: SNS-G4-2835-15LED
Dimension: Ø30X40mm
LED type: 15pcs SMD2835
Power(±10%): 2.5W
Lumen(Initial/30mins): 250lm / 220lm
Beam angle: 120°
Color: WW, NW, CW
CRI: Ra>80
Voltage: 10-40VDC
Material: PCB
Base: G4
Remark: Non-dimmable



Model: SNS-G4-5050-18LED
Dimension: Ø15X40mm
LED type: 18pcs SMD5050
Power(±10%): 3W
Lumen(Initial/30mins): 250lm / 220lm
Beam angle: 360°
Color: WW, NW, CW
CRI: Ra>80
Voltage: 10-30VDC
Material: PCB
Base: G4
Remark: Non-dimmable



Model: SNS-G4-5050-12LED
Dimension: Ø28X40mm
LED type: 12pcs SMD5050
Power(±10%): 1.3W
Lumen(Initial/30mins): 120lm / 100lm
Beam angle: 120°
Color: WW, NW, CW
CRI: Ra>80
Voltage: 12VAC/DC
Material: PCB
Base: G4
Remark: Non-dimmable



Model: SNS-G4-2835-18LED
Dimension: Ø30X40mm
LED type: 18pcs SMD2835
Power(±10%): 3W
Lumen(Initial/30mins): 300lm / 270lm
Beam angle: 120°
Color: WW, NW, CW
CRI: Ra>80
Voltage: 10-40VDC
Material: PCB
Base: G4
Remark: Non-dimmable



Model: SNS-G4-5050-49LED
Dimension: Ø25X46mm
LED type: 49pcs SMD5050
Power(±10%): 3.5W
Lumen(Initial/30mins): 330lm / 200lm
Beam angle: 360°
Color: WW, NW, CW
CRI: Ra>80
Voltage: 12VAC/DC
Material: PCB
Base: G4
Remark: Non-dimmable

G8 LED Light Series



Model: SNS-G8-2835T-16LED
Dimension: Ø13X37mm
LED type: 16pcs SMD2835
Power(±10%): 1.8W
Lumen(Initial/30mins): 150lm / 140lm
Beam angle: 360°
Color: WW, NW, CW
CRI: Ra>80
Voltage: 110-130VAC
Material: Silicone Glue
Base: G8
Remark: 0-100% Dimmable



Model: SNS-G8-3014T-48LED
Dimension: Ø13X36.5mm
LED type: 48pcs SMD3014
Power(±10%): 1.8W
Lumen(Initial/30mins): 150lm / 140lm
Beam angle: 360°
Color: WW, NW, CW
CRI: Ra>80
Voltage: 110-130VAC
Material: Silicone Glue
Base: G8
Remark: Dimmable



Model: SNS-G8-5730-8LED
Dimension: Ø13X40mm
LED type: 8pcs SMD5730
Power(±10%): 1.3W
Lumen(Initial/30mins): 190lm / 160lm
Beam angle: 360°
Color: WW, NW, CW
CRI: Ra>80
Voltage: 110-130VAC
Material: PC
Base: G8
Remark: Non-dimmable, No Flicker



Model: SNS-G8-2835-16LED
Dimension: Ø13X40mm
LED type: 16pcs SMD2835
Power(±10%): 1.3W
Lumen(Initial/30mins): 190lm / 160lm
Beam angle: 360°
Color: WW, NW, CW
CRI: Ra>80
Voltage: 110-130VAC
Material: PC
Base: G8
Remark: Non-dimmable, No Flicker

GY6.35 LED Light Series



Model: SNS-GY6.35-2835D-20LED
Dimension: Ø13X37mm
LED type: 20pcs SMD2835
Power(±10%): 2.4W
Lumen(Initial/30mins): 330lm / 290lm
Beam angle: 360°
Color: WW, NW, CW
CRI: Ra>80
Voltage: 12-24VAC/DC
Material: Silicone Glue
Base: GY6.35
Remark: Dimmable



Model: SNS-GY6.35-4014D-63LED
Dimension: Ø16.5X44mm
LED type: 63pcs SMD4014
Power(±10%): 3.2W
Lumen(Initial/30mins): 370lm / 300lm
Beam angle: 360°
Color: WW, NW, CW
CRI: Ra>80
Voltage: 12-24VAC/DC
Material: Ceramic + PC
Base: GY6.35
Remark: Dimmable



Model: SNS-GY6.35-4014-63LED
Dimension: Ø16.5X44mm
LED type: 63pcs SMD4014
Power(±10%): 3.2W
Lumen(Initial/30mins): 400lm / 330lm
Beam angle: 360°
Color: WW, NW, CW
CRI: Ra>80
Voltage: 12VAC/DC
Material: Ceramic + PC
Base: GY6.35
Remark: Non-dimmable



Model: SNS-GY6.35-4014-54LED
Dimension: Ø16.5X45mm
LED type: 54pcs SMD4014
Power(±10%): 3.1W
Lumen(Initial/30mins): 430lm / 360lm
Beam angle: 360°
Color: WW, NW, CW
CRI: Ra>80
Voltage: 100-265VAC
Material: Ceramic + PC
Base: GY6.35
Remark: Non-dimmable, No Flicker

B15 LED Light Series



Model: SNS-B15-4014D-45LED
Dimension: Ø17X38.8mm
LED type: 45pcs SMD4014
Power(±10%): 2W
Lumen(Initial/30mins): 240lm / 200lm
Beam angle: 360°
Color: WW, NW, CW
CRI: Ra>80
Voltage: 12-24VAC/DC
Material: Ceramic + PC
Base: BA15S, BA15D, BAU15S, BAY15D
Remark: Dimmable




Model: SNS-B15-4014D-63LED
Dimension: Ø17X56mm
LED type: 63pcs SMD4014
Power(±10%): 3W
Lumen(Initial/30mins): 360lm / 320lm
Beam angle: 360°
Color: WW, NW, CW
CRI: Ra>80
Voltage: 12-24VAC/DC
Material: Ceramic + PC
Base: BA15S, BA15D
Remark: Dimmable



Model: SNS-B15-2835T-34LED
Dimension: Ø16.5x56mm
LED type: 34pcs SMD2835
Power(±10%): 3.1W
Lumen(Initial/30mins): 400lm / 360lm
Beam angle: 360°
Color: WW, NW, CW
CRI: Ra>80
Voltage: 110-130VAC
Material: Ceramic + PC
Base: BA15D
Remark: 0-100% Dimmable, No Flicker



Model: SNS-B15-2835T-88LED
Dimension: Ø19x66.5mm
LED type: 88pcs SMD2835
Power(±10%): 4W
Lumen(Initial/30mins): 460lm / 420lm
Beam angle: 360°
Color: WW, NW, CW
CRI: Ra>80
Voltage: 110-130VAC / 220-240VAC
Material: Ceramic + PC
Base: BA15D
Remark: 0-100% Dimmable, No Flicker

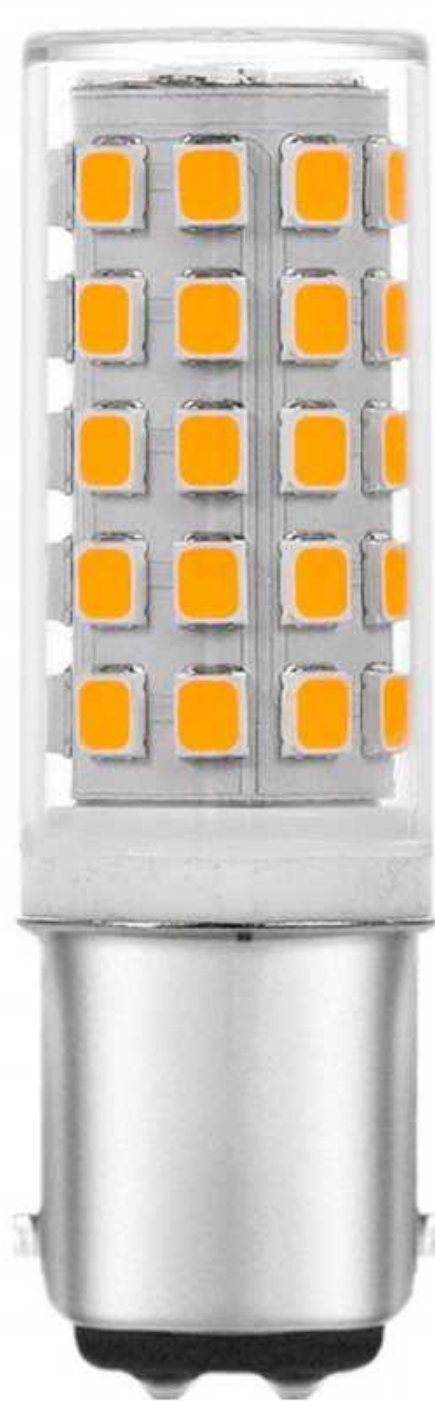

Model: SNS-B15-2835-54LED
Dimension: Ø16.5X56mm
LED type: 54pcs SMD2835
Power(±10%): 3.1W
Lumen(Initial/30mins): 450lm / 400lm
Beam angle: 360°
Color: WW, NW, CW
CRI: Ra>80
Voltage: 100-265VAC
Material: Ceramic + PC
Base: BA15D
Remark: Non-dimmable, No Flicker



Model: SNS-B15-2835-150LED
Dimension: Ø20X97mm
LED type: 150pcs SMD2835
Power(±10%): 15W
Lumen(Initial/30mins): 1500lm / 1400lm
Beam angle: 360°
Color: WW, NW, CW
CRI: Ra>80
Voltage: 100-277VAC
Material: Ceramic + PC
Base: BA15D
Remark: Non-dimmable, No Flicker

E12 LED Light Series



0-100% Dimmable

Model: SNS-E12-2835T-34LED
Dimension: Ø16.5X54.5mm
LED type: 34pcs SMD2835
Power(±10%): 3.1W
Lumen(Initial/30mins): 370lm / 330lm
Beam angle: 360°
Color: WW, NW, CW
CRI: Ra>80
Voltage: 110-130VAC
Material: Ceramic + PC
Base: E12
Remark: 0-100% Dimmable, No Flicker



0-100% Dimmable

Model: SNS-E12-2835T-88LED
Dimension: Ø18.5X66.5mm
LED type: 88pcs SMD2835
Power(±10%): 4W
Lumen(Initial/30mins): 460lm / 420lm
Beam angle: 360°
Color: WW, NW, CW
CRI: Ra>80
Voltage: 110-130VAC
Material: Ceramic + PC
Base: E12
Remark: 0-100% Dimmable, No Flicker



Model: SNS-E12-2835-54LED
Dimension: Ø16.5X54.5mm
LED type: 54pcs SMD2835
Power(±10%): 3.2W
Lumen(Initial/30mins): 430lm / 360lm
Beam angle: 360°
Color: WW, NW, CW
CRI: Ra>80
Voltage: 100-265VAC
Material: Ceramic + PC
Base: E12
Remark: Non-dimmable, No Flicker



Model: SNS-E12-2835-34LED
Dimension: Ø16.5X54.5mm
LED type: 34pcs SMD2835
Power(±10%): 3.1W
Lumen(Initial/30mins): 400lm / 360lm
Beam angle: 360°
Color: WW, NW, CW
CRI: Ra>80
Voltage: 110-130VAC
Material: Ceramic + PC
Base: E12
Remark: Non-dimmable, No Flicker



Model: SNS-E12-2835-88LED
Dimension: Ø18.5X66.5mm
LED type: 88pcs SMD2835
Power(±10%): 4.8W
Lumen(Initial/30mins): 630lm / 570lm
Beam angle: 360°
Color: WW, NW, CW
CRI: Ra>80
Voltage: 110-130VAC
Material: Ceramic + PC
Base: E12
Remark: Non-dimmable, No Flicker



Model: SNS-E12-2835-84LED
Dimension: Ø30x106.5mm
LED type: 84pcs SMD2835
Power(±10%): 7W
Lumen(Initial/30mins): 1150lm / 950lm
Beam angle: 360°
Color: WW, NW, CW
CRI: Ra>80
Voltage: 100-265VAC
Material: Ceramic + PC
Base: E12
Remark: Non-dimmable, No Flicker

E17 LED Light Series



Model: SNS-E17-2835-88LED
Dimension: Ø18X61mm
LED type: 88pcs SMD2835
Power(±10%): 5W
Lumen(Initial/30mins): 630lm / 570lm
Beam angle: 360°
Color: WW, NW, CW
CRI: Ra>80
Voltage: 110-130V / 220-240VAC
Material: Ceramic + PC
Base: E17
Remark: Non-dimmable, No Flicker



Model: SNS-E17-2835-51LED
Dimension: Ø17X53mm
LED type: 51pcs SMD2835
Power(±10%): 3W
Lumen(Initial/30mins): 330lm / 300lm
Beam angle: 360°
Color: WW, NW, CW
CRI: Ra>80
Voltage: 110-130V / 220-240VAC
Material: Ceramic + PC
Base: E17
Remark: Non-dimmable, No Flicker



Model: SNS-E17-2835-7LED
Dimension: Ø22X52mm
LED type: 7pcs SMD2835
Power(±10%): 1.5W
Lumen(Initial/30mins): 150lm / 130lm
Beam angle: 120°
Color: WW, NW, CW
CRI: Ra>80
Voltage: 110-130V / 220-240VAC
Material: Glass
Base: E17
Remark: Non-dimmable, No Flicker





Model: SNS-E14-2835T-88LED
Dimension: Ø18.5X65mm
LED type: 88pcs SMD2835
Power(±10%): 4W
Lumen(Initial/30mins): 460lm / 420lm
Beam angle: 360°
Color: WW, NW, CW
CRI: Ra>80
Voltage: 220-240VAC
Material: Ceramic + PC
Base: E14
Remark: 0-100% Dimmable, No Flicker



Model: SNS-E14-2835-88LED
Dimension: Ø18.5X65mm
LED type: 88pcs SMD2835
Power(±10%): 4.8W
Lumen(Initial/30mins): 630lm / 570lm
Beam angle: 360°
Color: WW, NW, CW
CRI: Ra>80
Voltage: 220-240VAC
Material: Ceramic + PC
Base: E14
Remark: Non-dimmable, No Flicker



Model: SNS-E14-2835-124LED
Dimension: Ø18.5x84mm
LED type: 124pcs SMD2835
Power(±10%): 7W
Lumen(Initial/30mins): 1150lm / 1000lm
Beam angle: 360°
Color: WW, NW, CW
CRI: Ra>80
Voltage: 100-265VAC
Material: Ceramic + PC
Base: E14
Remark: Non-dimmable, No Flicker



Model: SNS-E14-2835-51LED
Dimension: Ø18.8X54mm
LED type: 51pcs SMD2835
Power(±10%): 3.3W
Lumen(Initial/30mins): 470lm / 420lm
Beam angle: 360°
Color: WW, NW, CW
CRI: Ra>80
Voltage: 220-240VAC
Material: Ceramic + PC
Base: E14
Remark: Non-dimmable, No Flicker



Model: SNS-E14-2835A-32LED
Dimension: Ø17x52.5mm
LED type: 32pcs SMD2835
Power(±10%): 3W
Lumen(Initial/30mins): 390lm / 360lm
Beam angle: 360°
Color: WW, NW, CW
CRI: Ra>80
Voltage: 220-240VAC
Material: Ceramic + PC
Base: E14
Remark: Non-dimmable, No Flicker



Model: SNS-E14-2835B-32LED
Dimension: Ø18x51mm
LED type: 32pcs SMD2835
Power(±10%): 3W
Lumen(Initial/30mins): 370lm / 330lm
Beam angle: 360°
Color: WW, NW, CW
CRI: Ra>80
Voltage: 220-240VAC
Material: Ceramic + PC
Base: E14
Remark: Non-dimmable, No Flicker



Model: SNS-E14-2835-150LED
Dimension: Ø20X97mm
LED type: 150pcs SMD2835
Power(±10%): 15W
Lumen(Initial/30mins): 1500lm / 1400lm
Beam angle: 360°
Color: WW, NW, CW
CRI: Ra>80
Voltage: 100-277VAC
Material: Ceramic + PC
Base: E14
Remark: Non-dimmable, No Flicker



Model: SNS-E14-5730-75LED
Dimension: Ø18.6X73mm
LED type: 75pcs SMD5730
Power(±10%): 5.6W
Lumen(Initial/30mins): 900lm / 800lm
Beam angle: 360°
Color: WW, NW, CW
CRI: Ra>80
Voltage: 100-265VAC
Material: Ceramic + PC
Base: E14
Remark: Non-dimmable, No Flicker



Model: SNS-E14-2835-54LED
Dimension: Ø16.5X56mm
LED type: 54pcs SMD2835
Power(±10%): 3.2W
Lumen(Initial/30mins): 450lm / 400lm
Beam angle: 360°
Color: WW, NW, CW
CRI: Ra>80
Voltage: 100-265VAC
Material: Ceramic + PC
Base: E14
Remark: Non-dimmable, No Flicker



Model: SNS-E14-3014-64LED
Dimension: Ø15X53mm
LED type: 64pcs SMD3014
Power(±10%): 2.5W
Lumen(Initial/30mins): 200lm / 160lm
Beam angle: 360°
Color: WW, NW, CW
CRI: Ra>80
Voltage: 220-240VAC
Material: Silicone Glue
Base: E14
Remark: Non-dimmable, No Flicker



Model: SNS-E14-2835-7LED
Dimension: Ø22X52mm
LED type: 7pcs SMD2835
Power(±10%): 1.5W
Lumen(Initial/30mins): 150lm / 130lm
Beam angle: 120°
Color: WW, NW, CW
CRI: Ra>80
Voltage: 110-130V / 220-240VAC
Material: Glass
Base: E14
Remark: Non-dimmable, No Flicker



Model: SNS-E14-2835-4LED
Dimension: Ø18X48mm
LED type: 4pcs SMD2835
Power(±10%): 1.2W
Lumen(Initial/30mins): 110lm / 90lm
Beam angle: 120°
Color: WW, NW, CW
CRI: Ra>80
Voltage: 220-240VAC
Material: PC
Base: E14
Remark: Non-dimmable, No Flicker

E27 LED Light Series



Model: SNS-T30-2835T-94LED

Dimension: Ø30x98.5mm
LED type: 94pcs SMD2835
Power(±10%): 7W
Lumen(Initial/30mins): 1000lm / 900lm
Beam angle: 360°
Color: WW, NW, CW
CRI: Ra>80
Voltage: 220-240VAC
Material: Aluminum + PC
Base: E27
Remark: 0-100% Dimmable, No Flicker



Model: SNS-T30-2835-112LED

Dimension: Ø30x100mm
LED type: 112pcs SMD2835
Power(±10%): 9W
Lumen(Initial/30mins): 1200lm / 1100lm
Beam angle: 360°
Color: WW, NW, CW
CRI: Ra>80
Voltage: 100-265VAC
Material: Ceramic + PC
Base: E27
Remark: Non-dimmable, No Flicker



Model: SNS-T30-2835-200LED

Dimension: Ø30x100mm
LED type: 200pcs SMD2835
Power(±10%): 9W
Lumen(Initial/30mins): 1000lm / 900lm
Beam angle: 360°
Color: 2700K-4000K-6000K
CRI: Ra>80
Voltage: 220-240VAC
Material: Ceramic + PC
Base: E27
Remark: 3-Color smart, Dimmable



Model: SNS-T30-2835-96LED

Dimension: Ø30x84mm
LED type: 96pcs SMD2835
Power(±10%): 7W
Lumen(Initial/30mins): 800lm / 700lm
Beam angle: 360°
Color: 2700K-4000K-6000K
CRI: Ra>80
Voltage: 220-240VAC
Material: Ceramic + PC
Base: E27
Remark: 3-Color smart, Dimmable



Model: SNS-T35-2835-96LED

Dimension: Ø35x98mm
LED type: 96pcs SMD2835
Power(±10%): 8.5W
Lumen(Initial/30mins): 1200lm / 1100lm
Beam angle: 360°
Color: WW, NW, CW
CRI: Ra>80
Voltage: 100-265VAC
Material: Ceramic + PC
Base: E26 / E27
Remark: Non-dimmable, No Flicker



Model: SNS-T35-2835-112LED

Dimension: Ø35x112mm
LED type: 112pcs SMD2835
Power(±10%): 12W
Lumen(Initial/30mins): 1500lm / 1200lm
Beam angle: 360°
Color: WW, NW, CW
CRI: Ra>80
Voltage: 100-265VAC
Material: Ceramic + PC
Base: E26 / E27
Remark: Non-dimmable, No Flicker



Model: SNS-T30-2835-60LED

Dimension: Ø30x82mm
LED type: 60pcs SMD2835
Power(±10%): 5W
Lumen(Initial/30mins): 750lm / 650lm
Beam angle: 360°
Color: WW, NW, CW
CRI: Ra>80
Voltage: 100-265VAC
Material: Aluminum + PC
Base: E26 / E27
Remark: Non-dimmable, No Flicker



Model: SNS-T30-2835A-84LED

Dimension: Ø30x98.5mm
LED type: 84pcs SMD2835
Power(±10%): 7W
Lumen(Initial/30mins): 1150lm / 950lm
Beam angle: 360°
Color: WW, NW, CW
CRI: Ra>80
Voltage: 100-265VAC
Material: Aluminum + PC
Base: E26 / E27
Remark: Non-dimmable, No Flicker



Model: SNS-T30-2835B-84LED

Dimension: Ø30x84mm
LED type: 84pcs SMD2835
Power(±10%): 7W
Lumen(Initial/30mins): 1150lm / 950lm
Beam angle: 360°
Color: WW, NW, CW
CRI: Ra>80
Voltage: 100-265VAC
Material: Ceramic + PC
Base: E26 / E27
Remark: Non-dimmable, No Flicker




Model: SNS-T40-2835-120LED

Dimension: Ø40x125mm
LED type: 120pcs SMD2835
Power(±10%): 12W
Lumen(Initial/30mins): 1800lm / 1600lm
Beam angle: 360°
Color: WW, NW, CW
CRI: Ra>80
Voltage: 100-265VAC
Material: Aluminum + PC
Base: E26 / E27
Remark: Non-dimmable, No Flicker



Model: SNS-T40-2835-150LED

Dimension: Ø40x132mm
LED type: 150pcs SMD2835
Power(±10%): 15W
Lumen(Initial/30mins): 2100lm / 1800lm
Beam angle: 360°
Color: WW, NW, CW
CRI: Ra>80
Voltage: 100-265VAC
Material: Aluminum + PC
Base: E26 / E27
Remark: Non-dimmable, No Flicker

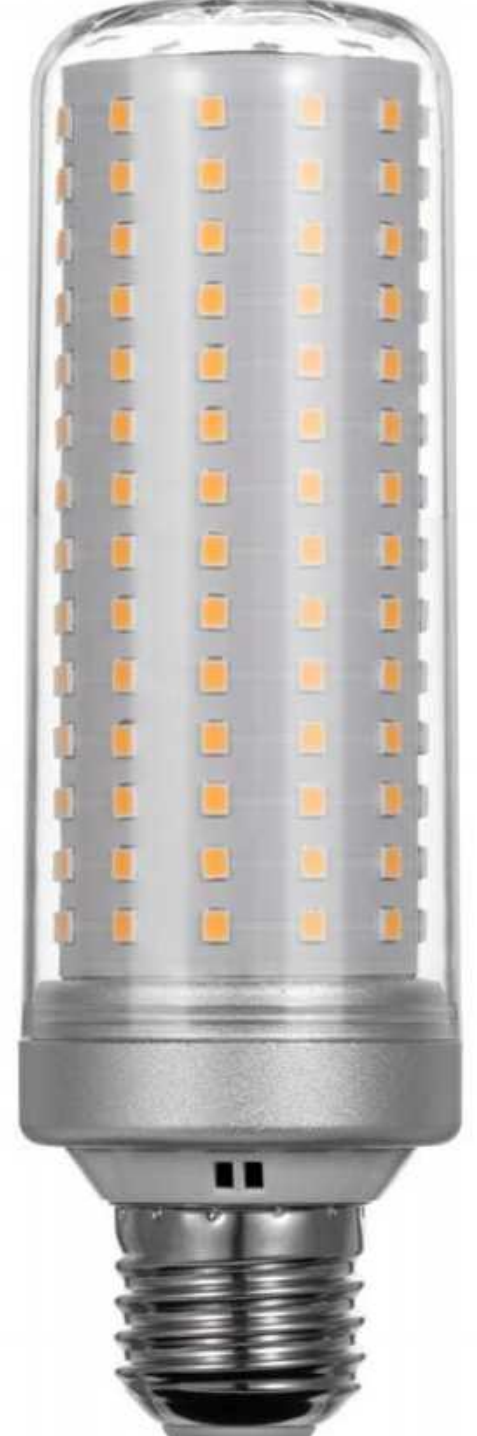

Model: SNS-T45-2835-180LED

Dimension: Ø45x150mm
LED type: 180pcs SMD2835
Power(±10%): 18W
Lumen(Initial/30mins): 2800lm / 2500lm
Beam angle: 360°
Color: WW, NW, CW
CRI: Ra>80
Voltage: 100-265VAC
Material: Aluminum + PC
Base: E26 / E27
Remark: Non-dimmable, No Flicker

E27 LED Light Series



Model: SNS-MR11-2WC
Dimension: Ø35X35mm
LED type: 1pc COB
Power(±10%): 1.8W
Lumen(Initial/30mins): 210lm / 170lm
Beam angle: 60°
Color: WW
Color temperature: 2700K, 3000K
CRI: Ra>80
Voltage: 12-24VAC/DC
Material: Glass
Base: GU4
Remark: Non-dimmable



Model: SNS-MR11-12LED
Dimension: Ø35X35mm
LED type: 12pcs SMD2835
Power(±10%): 1.8W
Lumen(Initial/30mins): 160lm / 140lm
Beam angle: 120°
Color: WW, NW, CW
Color temperature: 2700K, 3000K, 4000K, 6000K
CRI: Ra>80
Voltage: 10-36DC
Material: Glass
Base: GU4
Remark: Non-dimmable



Model: SNS-MR11-18LED
Dimension: Ø35X35mm
LED type: 18pcs SMD2835
Power(±10%): 2W
Lumen(Initial/30mins): 200lm / 170lm
Beam angle: 120°
Color: WW, NW, CW
Color temperature: 2700K, 3000K, 4000K, 6000K
CRI: Ra>80
Voltage: 12VAC/DC
Material: Glass
Base: GU4
Remark: Dimmable



Model: SNS-MR11-2WP
Dimension: Ø35X35mm
LED type: 3pcs SMD2835
Power(±10%): 2W
Lumen(Initial/30mins): 180lm / 160lm
Beam angle: 36°
Color: WW, NW, CW
Color temperature: 2700K, 3000K, 4000K, 6000K
CRI: Ra>80
Voltage: 12VAC/DC
Material: Plastic+Aluminum
Base: GU4
Remark: Dimmable



Model: SNS-MR11-3WG
Dimension: Ø35X42mm
LED type: 1pc COB
Power(±10%): 3.2W
Lumen(Initial/30mins): 320lm / 280lm
Beam angle: 38°
Color: WW, NW, CW
Color temperature: 2700K, 3000K, 4000K, 6000K
CRI: Ra>80
Voltage: 12VAC/DC
Material: Glass
Base: GU4
Remark: Dimmable



Model: SNS-MR11-3.5WP
Dimension: Ø35X42mm
LED type: 3pcs SMD2835
Power(±10%): 3.5W
Lumen(Initial/30mins): 350lm / 320lm
Beam angle: 38°
Color: WW, NW, CW
Color temperature: 2700K, 3000K, 4000K, 6000K
CRI: Ra>80
Voltage: 12VAC/DC
Material: Plastic+Aluminum
Base: GU4
Remark: Dimmable



Model: SNS-MR16-MS5WP5
Dimension: Ø50X52mm
LED type: 1pc COB1313
Power(±10%): 5W
Lumen(Initial/30mins): 600lm / 500lm
Beam angle: 36°
Color: WW, NW, CW
Color temperature: 2700K, 3000K, 4000K, 6000K
CRI: Ra>80
Voltage: 12VAC/DC
Material: Plastic+Aluminum
Base: GU5.3
Remark: Non-dimmable, No Flicker



Model: SNS-MR16-DS5WP2
Dimension: Ø50X52mm
LED type: 7pcs SMD2835
Power(±10%): 5.3W
Lumen(Initial/30mins): 650lm / 550lm
Beam angle: 36°
Color: WW, NW, CW
Color temperature: 2700K, 3000K, 4000K, 6000K
CRI: Ra>80
Voltage: 12VAC/DC
Material: Plastic+Aluminum
Base: GU5.3
Remark: Non-dimmable, No Flicker



Model: SNS-MR16-DS5WP3
Dimension: Ø50X52mm
LED type: 7pcs SMD2835
Power(±10%): 5.3W
Lumen(Initial/30mins): 650lm / 550lm
Beam angle: 36°
Color: WW, NW, CW
Color temperature: 2700K, 3000K, 4000K, 6000K
CRI: Ra>80
Voltage: 12VAC/DC
Material: Plastic+Aluminum
Base: GU5.3
Remark: Non-dimmable, No Flicker



Model: SNS-MR16-DS5WP4
Dimension: Ø50X54mm
LED type: 8pcs SMD2835
Power(±10%): 5W
Lumen(Initial/30mins): 650lm / 550lm
Beam angle: 36°
Color: WW, NW, CW
Color temperature: 2700K, 3000K, 4000K, 6000K
CRI: Ra>80
Voltage: 12VAC/DC
Material: Plastic+Aluminum
Base: GU5.3
Remark: Non-dimmable, No Flicker



Model: SNS-MR16-DS5WP5
Dimension: Ø50X54mm
LED type: 8pcs SMD2835
Power(±10%): 5W
Lumen(Initial/30mins): 650lm / 550lm
Beam angle: 36°
Color: WW, NW, CW
Color temperature: 2700K, 3000K, 4000K, 6000K
CRI: Ra>80
Voltage: 12VAC/DC
Material: Plastic+Aluminum
Base: GU5.3
Remark: Non-dimmable, No Flicker



Model: SNS-MR16-HA5WG3
Dimension: Ø50X47mm
LED type: 1pc COB
Power(±10%): 5W
Lumen(Initial/30mins): 450lm / 400lm
Beam angle: 36°
Color: WW, NW, CW
Color temperature: 2700K, 3000K, 4000K, 6000K
CRI: Ra>80
Voltage: 12VAC/DC
Material: Glass
Base: GU5.3
Remark: Non-dimmable



Features:

- Different power are available: 3W/4W/5W/6W/7W
- Use high quality COB LED
- Input Voltage: 12VAC/DC
- Color: WW, NW, CW
- Color temperature: 2700K, 3000K, 4000K, 5500K
- Material: Aluminum
- Housing color: Black / White
- IP Grade: IP68
- No Flicker
- Dimmable and non-dimmable are available
- Warranty: 5 Years



Model	Power	Lumen (Initial/30mins)	LED Type	Beam Angle	CRI	Dimension	Voltage
SNS-MR16-MS3WA6	3W	270lm/240lm	1pc COB	18°/36°/60°	Ra>80	Ø50X46mm	12VAC/DC
SNS-MR16-MS4WA6	4W	380lm/320lm	1pc COB	18°/36°/60°	Ra>80	Ø50X46mm	12VAC/DC
SNS-MR16-MS5WA6	5W	450lm/400lm	1pc COB	18°/36°/60°	Ra>80	Ø50X46mm	12VAC/DC
SNS-MR16-MS6WA6	6W	540lm/500lm	1pc COB	18°/36°/60°	Ra>80	Ø50X46mm	12VAC/DC
SNS-MR16-MS7WA6	7W	600lm/550lm	1pc COB	18°/36°/60°	Ra>80	Ø50X46mm	12VAC/DC

Dim to WARM



Model: SNS-GU10-DW-5W
Dimension: Ø50X60mm
LED type: 1pc COB
Power(±10%): 5W
Lumen(Initial/30mins): 500lm / 450lm
Beam angle: 15°/24°/36°/60°
Color: WW
Color temperature: 1800K-3000K
CRI: Ra>90
Voltage: 110-130VAC / 220-240VAC
Material: Aluminum
Base: GU10
Remark: Dimmable, No Flicker

Dim to WARM



Model: SNS-GU10-DW-7W
Dimension: Ø50X60mm
LED type: 1pc COB
Power(±10%): 7W
Lumen(Initial/30mins): 700lm / 650lm
Beam angle: 15°/24°/36°/60°
Color: WW
Color temperature: 1800K-3000K
CRI: Ra>90
Voltage: 110-130VAC / 220-240VAC
Material: Aluminum
Base: GU10
Remark: Dimmable, No Flicker

0-100% Dimmable



Model: SNS-GU10-MS8W
Dimension: Ø50X60mm
LED type: 8pcs SMD2835
Power(±10%): 8W
Lumen(Initial/30mins): 700lm / 650lm
Beam angle: 38°
Color: WW, NW, CW
Color temperature: 2700K, 3000K, 4000K, 6000K
CRI: Ra>80
Voltage: 220-240VAC
Material: Plastic+Aluminum
Base: GU10
Remark: Dimmable, No Flicker



Model: SNS-GU10-MS5WDP5
Dimension: Ø50X54mm
LED type: 1pc COB1313
Power(±10%): 4.8W
Lumen(Initial/30mins): 540lm / 500lm
Beam angle: 36°
Color: WW, NW, CW
Color temperature: 2700K, 3000K, 4000K, 6000K
CRI: Ra>80
Voltage: 110-130VAC / 220-240VAC
Material: Plastic+Aluminum
Base: GU10
Remark: 0-100% Dimmable, No Flicker



Model: SNS-GU10-MS5WDP2
Dimension: Ø50X55mm
LED type: 8pcs SMD2835
Power(±10%): 4.8W
Lumen(Initial/30mins): 540lm / 500lm
Beam angle: 45°
Color: WW, NW, CW
Color temperature: 2700K, 3000K, 4000K, 6000K
CRI: Ra>80
Voltage: 110-130VAC / 220-240VAC
Material: Plastic+Aluminum
Base: GU10
Remark: 0-100% Dimmable, No Flicker



Model: SNS-GU10-MS5WP2
Dimension: Ø50X55mm
LED type: 7pcs SMD2835
Power(±10%): 5W
Lumen(Initial/30mins): 570lm / 500lm
Beam angle: 45°
Color: WW, NW, CW
Color temperature: 2700K, 3000K, 4000K, 6000K
CRI: Ra>80
Voltage: 220-240VAC
Material: Plastic+Aluminum
Base: GU10
Remark: Non-dimmable, No Flicker



Model: SNS-GU10-MS5WP5
Dimension: Ø50X54mm
LED type: 1pc COB1313
Power(±10%): 4.8W
Lumen(Initial/30mins): 540lm / 500lm
Beam angle: 36°
Color: WW, NW, CW
Color temperature: 2700K, 3000K, 4000K, 6000K
CRI: Ra>80
Voltage: 110-130VAC / 220-240VAC
Material: Plastic+Aluminum
Base: GU10
Remark: Non-dimmable, No Flicker



Model: SNS-GU10-DS5WP5
Dimension: Ø50X55mm
LED type: 7pcs SMD2835
Power(±10%): 5W
Lumen(Initial/30mins): 500lm / 450lm
Beam angle: 38°
Color: WW, NW, CW
Color temperature: 2700K, 3000K, 4000K, 6000K
CRI: Ra>80
Voltage: 110-130VAC / 220-240VAC
Material: Plastic+Aluminum
Base: GU10
Remark: Non-dimmable, No Flicker



Model: SNS-GU10-DS7WP6
Dimension: Ø50X55mm
LED type: 8pcs SMD2835
Power(±10%): 6.5W
Lumen(Initial/30mins): 850lm / 750lm
Beam angle: 38°
Color: WW, NW, CW
Color temperature: 2700K, 3000K, 4000K, 6000K
CRI: Ra>80
Voltage: 100-265VAC
Material: Plastic+Aluminum
Base: GU10
Remark: Non-dimmable, No Flicker



Model: SNS-R7S-2835-48LED
Dimension: Ø15X78mm
LED type: 48pcs SMD2835
Power(±10%): 4.2W
Lumen(Initial/30mins): 530lm / 480lm
Beam angle: 360°
Color: WW, NW, CW
Color temperature: 2700K, 3000K, 4000K, 6000K
CRI: Ra>80
Voltage: 110-130VAC / 220-240VAC
Material: Ceramic + PC
Base: R7S
Remark: Non-dimmable, No Flicker



Model: SNS-R7S-2835-96LED
Dimension: Ø15X118mm
LED type: 96pcs SMD2835
Power(±10%): 8W
Lumen(Initial/30mins): 1050lm / 950lm
Beam angle: 360°
Color: WW, NW, CW
Color temperature: 2700K, 3000K, 4000K, 6000K
CRI: Ra>80
Voltage: 110-130VAC / 220-240VAC
Material: Ceramic + PC
Base: R7S
Remark: Non-dimmable, No Flicker



Model: SNS-R7S-2835-108LED
Dimension: Ø25X118mm
LED type: 108pcs SMD2835
Power(±10%): 9.5W
Lumen(Initial/30mins): 1250lm / 1150lm
Beam angle: 180°
Color: WW, NW, CW
Color temperature: 2700K, 3000K, 4000K, 6000K
CRI: Ra>80
Voltage: 100-265VAC
Material: Ceramic + PC
Base: R7S
Remark: Non-dimmable, No Flicker



Model: SNS-PLH-6W
Dimension: Ø34.3X137.5mm(G24)
LED type: 2835SMD
Power(±10%): 6W
Lumen(Initial/30mins): 660lm / 600lm
Beam angle: 120°
Color: WW, NW, CW
Color temperature: 2700K, 3000K, 4000K, 5000K, 6000K
CRI: Ra>80
Voltage: 100-277VAC
Rotating: 270° rotating base
Cover: Frosted / Clear
Material: Aluminum+PC
Base: G24D/G24Q/G23/GX23/GU24/E26/E27
Warranty: 5 years
Remark: Non-dimmable, Equivalence 13W CFL



Model: SNS-PLH-8W
Dimension: Ø34.3X161.5mm(G24)
LED type: 2835SMD
Power(±10%): 8W
Lumen(Initial/30mins): 880lm / 800lm
Beam angle: 120°
Color: WW, NW, CW
Color temperature: 2700K, 3000K, 4000K, 5000K, 6000K
CRI: Ra>80
Voltage: 100-277VAC
Rotating: 270° rotating base
Cover: Frosted / Clear
Material: Aluminum+PC
Base: G24D/G24Q/G23/GX23/GU24/E26/E27
Warranty: 5 years
Remark: Non-dimmable, Equivalence 18W CFL



Model: SNS-PLH-11W
Dimension: Ø34.3X185.5mm(G24)
LED type: 2835SMD
Power(±10%): 11W
Lumen(Initial/30mins): 1250lm / 1100lm
Beam angle: 120°
Color: WW, NW, CW
Color temperature: 2700K, 3000K, 4000K, 5000K, 6000K
CRI: Ra>80
Voltage: 100-277VAC
Rotating: 270° rotating base
Cover: Frosted / Clear
Material: Aluminum+PC
Base: G24D/G24Q/G23/GX23/GU24/E26/E27
Warranty: 5 years
Remark: Non-dimmable, Equivalence 26W CFL